

COLD-HOT PLATE

INNOVATION

Temperature from **-5°** to **+140° C**
continuously adjustable via display

BUILT-IN-MODELS

- plug-in ready
- remote cooling system

Function

Cold-Hot Plate for keeping dishes cold or warm at temperatures ranging from -5° to +140° C (at an ambient temperature of +24° C)

Sizes

GN1/1 330 x 530 mm GN2/1 660 x 530 mm
GN3/1 990 x 530 mm GN4/1 1320 x 530 mm
round Ø 480 mm, special dimensions on request

Surfaces

- Gorilla glass 2 mm (not for special dimensions)
9010 white or 9004 black
- ESG glass 4-6 mm RAL colours
- Stainless steel 1 mm
- Dekton 12 mm (artificial stone)
all Dekton decors available

Variants

plug-in ready
connected to a remote cooling system

Power Requirements

230 V – 50/60 Hz

GN1/1 850 W GN2/1 1520 W
GN3/1 2340 W GN4/1 3040 W
round, approx. 100 W

Refrigerant



plug-in R600a, GN4/1 R290
remote cooling system R134a / R404a / R507a

Scope of Delivery

Controller incl. 1.2 m cable
Supply line 1.6 m with Schuko plug

Important Information

Regarding installation, maintenance and care can be found in the user manual (e.g. supply and exhaust air)

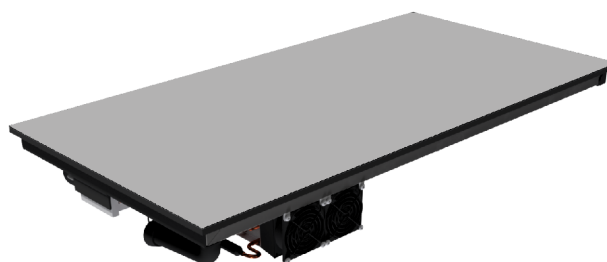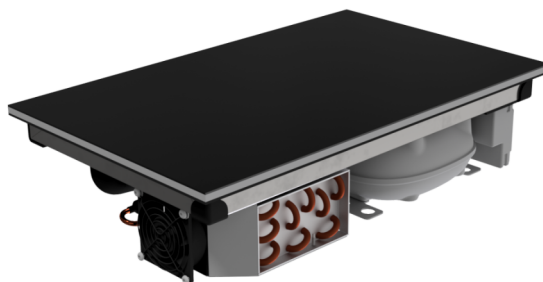

COLD PLATE

INNOVATION

Temperature from **-5°** to **+15° C**
continuously adjustable via display

BUILT-IN-MODELS

- plug-in ready
- remote cooling system

Function

Cold Plate for keeping dishes cold
at temperatures ranging from -5° to +15° C
(at an ambient temperature of +24° C)

Sizes

GN1/1 330 x 530 mm GN2/1 660 x 530 mm
GN3/1 990 x 530 mm GN4/1 1320 x 530 mm
round Ø 480 mm, special dimensions on request

Surfaces

- Gorilla glass 2 mm (not for special dimensions)
9010 white or 9004 black
- ESG glass 4-6 mm RAL colours
- Stainless steel 1 mm
- Dekton 12 mm (artificial stone)
all Dekton decors available

Variants

plug-in ready
connected to a remote cooling system

Power Requirements

230 V – 50/60 Hz

GN1/1 100 W GN2/1 100 W
GN3/1 100 W GN4/1 350 W
round, approx. 100 W

Refrigerant



plug-in R600a, GN4/1 R290
remote cooling system R134a / R404a / R507a

Scope of Delivery

Controller incl. 1.2 m cable
Supply line 1.6 m with Schuko plug

Important Information

Regarding installation, maintenance and care
can be found in the user manual
(e.g. supply and exhaust air)

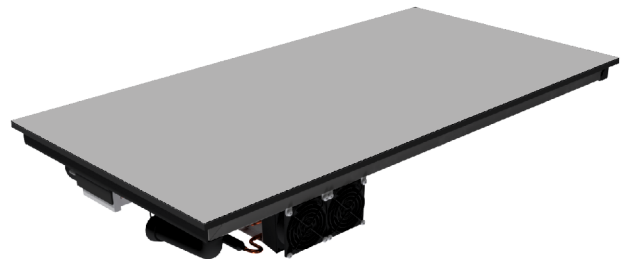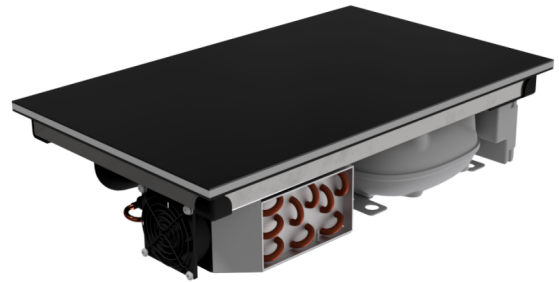

Version A23 CE NSF

in Bearbeitung UL

HOT PLATE

INNOVATION

Temperature from **+20°** to **+140° C**
continuously adjustable via display

BUILT-IN-MODELS

- plug-in ready

Function

Hot Plate for keeping dishes warm
at temperatures from +20° to +140° C
(at an ambient temperature of +24° C)

Sizes

GN1/1 330 x 530 mm GN2/1 660 x 530 mm
GN3/1 990 x 530 mm GN4/1 1320 x 530 mm
round Ø 480 mm, special dimensions on request

Surfaces

- Gorilla glass 2 mm (not for special dimensions)
9010 white or 9004 black
- ESG 4-6 mm RAL colours
- Stainless steel 1 mm
- Dekton 12 mm (artificial stone)
all Dekton decors available

Variants

plug-in ready

Power Requirements

230 V – 50/60 Hz

GN1/1 850 W GN2/1 1520 W
GN3/1 2340 W GN4/1 3040 W
round, approx. 100 W

Scope of Delivery

Controller incl. 1.2 m cable
Supply line 1.6 m with Schuko plug

Important Information

Regarding installation, maintenance and care
can be found in the user manual

